

Yttrium- Stabilized Zirconium Oxide, YSZ

Sputtering Targets



Advanced Engineering Materials

Applications

- Fuel cells
- Oxygen sensors

Features


- High purity
- Custom Sizes Available

Process

- Manufacturing
 - Cold pressed
 - Sintered
 - Indium bonded to backing plate
- Cleaning and final packaging
 - Cleaned for use in vacuum
 - Protection from environmental contaminants
 - Protection during shipment

Options

- 99.9% minimum purity
- Up to 12.0" Targets Available
- Planar Tiles Up to 8" X 5" for Larger Target Configurations

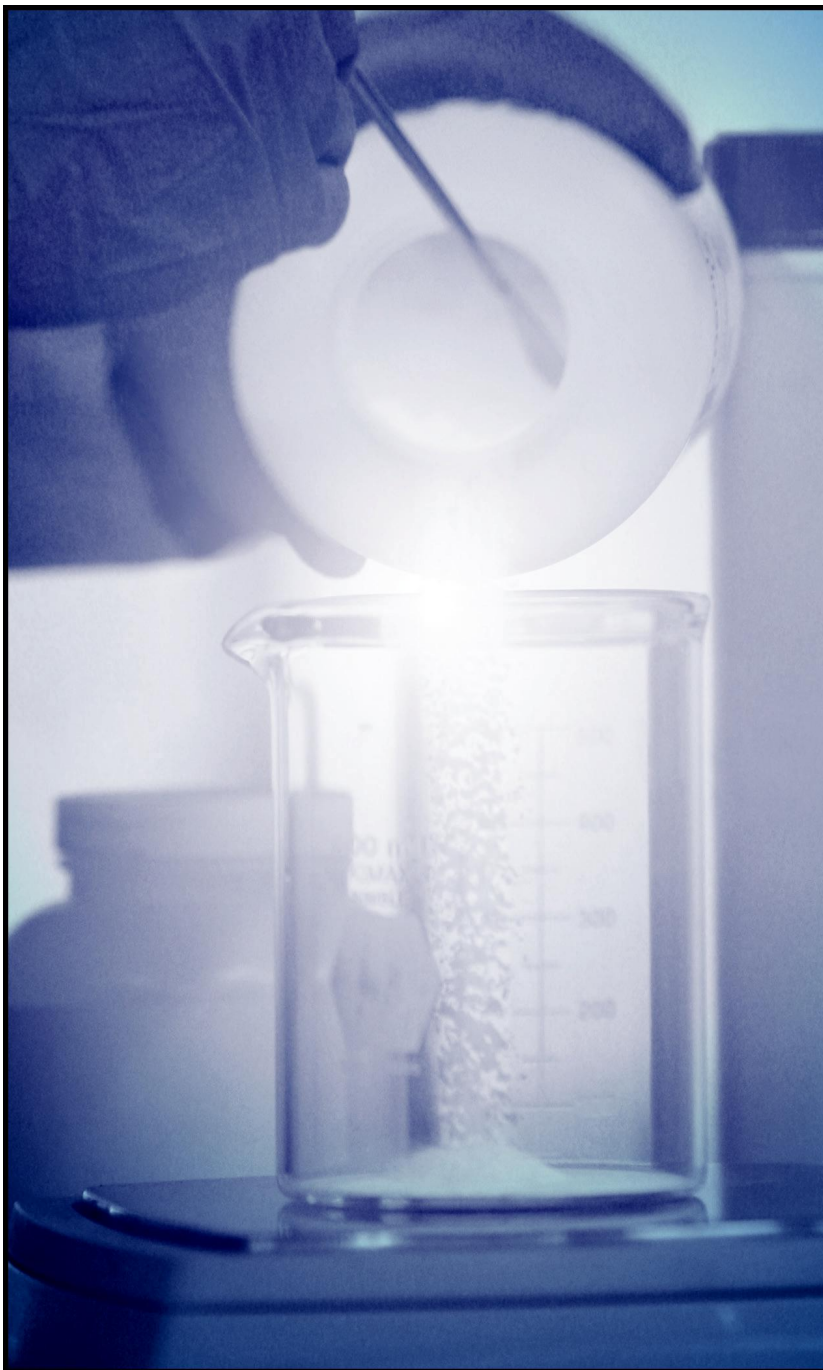

Specifications

Typical Analysis - 99.9% (3N) Purity

Metallic Impurities, ppm by weight

Ca	Fe	Na	Si	Ti	Er	Ho
<10	<20	<15	<100	<15	<15	<10

Theoretical Density	5.9 g/cc
Typical Density	>5.0 g/cc
Appearance	White/Beige
Particle Size	D50

Advanced Engineering Materials

E-mail: sales@aemproduct.com

Tel: +86-731-84472418

+86-18175985920

Website: www.aemdeposition.com

Address: Rm. 408, Building 1, No. 31, Yinshan Road
Yuelu District, Changsha, Hunan 410013